


ACS Double Flap Valve

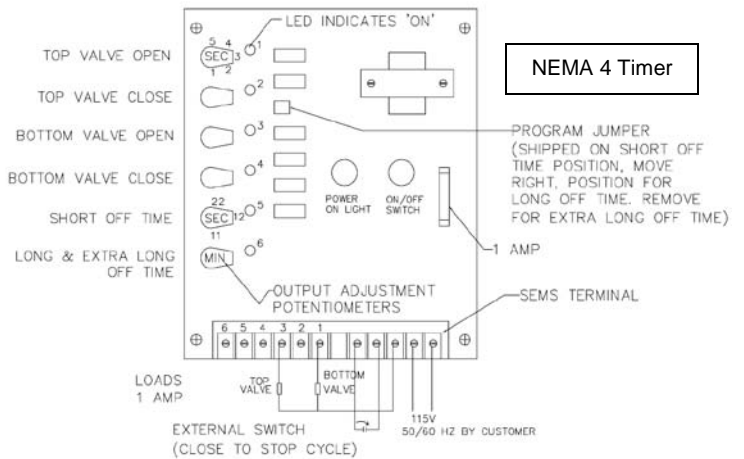

Features

- Available in 3 standard sizes (8" x 10" x 12")
- Also available in custom sizes
- Dependable effective design
- Pressure differential rated for 30" H₂O
- 10 ga. carbon steel housing construction
- Carbon steel flappers with neoprene seal strips
- Pneumatic Operation
- Standard temperature up to 250° F
- Complete factory assembled unit
Including: timer, solenoid valve, filter regulator, flow control valve, lubricator, regulator
- Easy to maintain
- Capacity Dutchman with inspection door

Options

- Single & double flap configuration available
- Available in gravity counter weight design
- Stainless Steel construction available
- Inlet/outlet round flange adapters
- Abrasion resistant steel flappers
- Elevated temperature to 500° F
- Dutchman can be removed to shorten overall height
- NEMA 4 timer, 115-50/60-1, power on light, on/off switch, timer can operate up to 6 valves
- Special heavy duty housing construction
- Gearmotor with chain drive & cam available
- For CAPACITY CHART see PAGE 2



611 Argyle St. N. Caledonia, Ontario N3W 1M1

TEL: (800) 655-3447

FAX: (800) 955-4991

Email: sales@acsvalves.com

Website: www.acsvalves.com

ACS DOUBLE FLAP VALVE CAPACITY CHART

SIZE	CFH
6"	50
8"	100
10"	200
12"	350
14"	600
16"	790