


Pressure Blower Package

High-performance, High-efficiency Positive Displacement Systems

ACS Valves blower packages are crated in heavy-duty, four-panel enclosures to ensure complete protection in transit, and quick setup upon arrival.

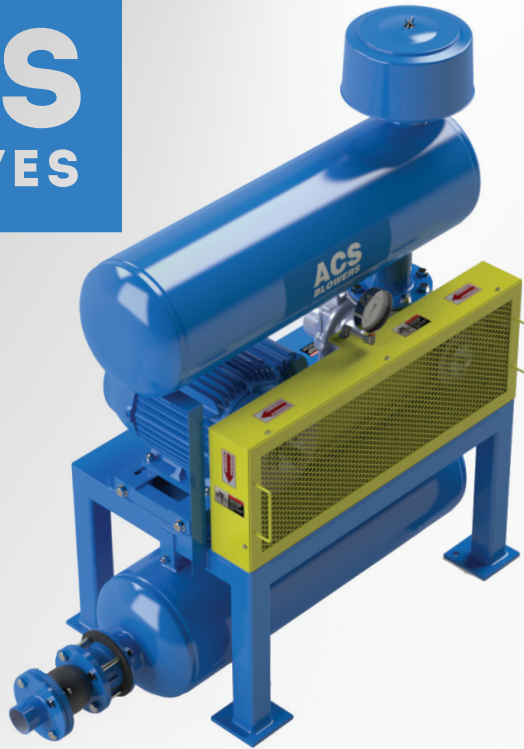

SECTOR INDUSTRIES:



Plastics



Pet Food



Construction



Food



Pharmaceutical
and Cosmetics



Chemical

FEATURES

<ul style="list-style-type: none"> Blower system design provides pressure conveying functions for dry bulk material handling operations requiring optimal balance of blower power and energy efficiency. 	<ul style="list-style-type: none"> V-belt drive simplifies maintenance, runs quietly; drive guard protects personnel. 	<ul style="list-style-type: none"> Discharge expansion joint enables consistent pressure levels in operations with varied temperatures.
<ul style="list-style-type: none"> Fully assembled system built on mild steel skid with complete side-protection frame; primed and painted. 	<ul style="list-style-type: none"> Spring pressure relief valve maintains tight seal till tank pressure reaches relief setting. 	<h3>OPTIONS</h3>
<ul style="list-style-type: none"> Roots positive displacement blower; sized and specified to application-specific requirements. 	<ul style="list-style-type: none"> Inlet filter protects system from introduction of damaging, harmful contaminants. 	<ul style="list-style-type: none"> Customer-specific positive displacement blower brands and specifications.
<ul style="list-style-type: none"> High-efficiency, TEFC motor. 	<ul style="list-style-type: none"> Inlet & discharge silencers 	<ul style="list-style-type: none"> Customer-specific paint and finish coatings.
<ul style="list-style-type: none"> Adjustable motor base; accommodates multiple motor types, simplifies standards compliance. 	<ul style="list-style-type: none"> Back check valve enables proper flow and pressure. 	<ul style="list-style-type: none"> Sound enclosure
	<ul style="list-style-type: none"> Pressure gauge provides accurate monitoring and measure; aids in system optimization and efficiency. 	<ul style="list-style-type: none"> Vibration pads
		<ul style="list-style-type: none"> Pressure switch

<p>SPECIFICATIONS:</p>	<p>INLET/OUTLET FLANGE SIZES:</p>	<p>MATERIAL OF CONSTRUCTION:</p>	<p>SIZE RANGE:</p>
	<p>N/A</p>	<p>Mild Steel</p>	<p>3HP to 200HP 12 psi 100 - 3000 12 psi max</p>